

The Bowl

Adapter

(Optional) For reducing molded-in 1.5" NPT threads

Hex

Easy wrench installation

Magnet

(Optional) For capturing and viewing wear debris

Shield

Molded in to protect the valve

Brass Drain Valve

Spiral open, turn to lock

Eyelets

Attach ID tags and other information

Single-piece Design

Molded-in 1.5" NPT male threads to eliminate potential leak points

360° View

Large viewing surface with no molded-in obstructions for easy viewing of the oil

Rounded Bottom

For easy viewing and purging of sediment and water

Proactive Monitoring Made Simple.



Luneta announces the release of its newest product: the Bowl. The ultimate 2-in-1 accessory, the Bowl serves as both a sight glass and BS&W bowl. Made of impact-resistant Tritan™, the Bowl is stronger than other drain port sight glasses, crystal clear and chemically resistant. The distinctive contour design allows for immediate visual inspection of the oil, along with early detection of potential contamination

problems such as water and sediment. Providing a visual indication of wear debris while the machine is running, the Bowl's rare earth magnetic drain plug also protects machinery by attracting and drawing wear particles to the bottom, proactively preventing machine failure and enabling a thorough drain of contaminants. **Eliminate contamination and downtime with the Bowl.**



Designed for:
 Drain Port Applications
 Bottom Sediment Collection
 Water & Debris Collection
 Monitoring & Purging

The Bowl

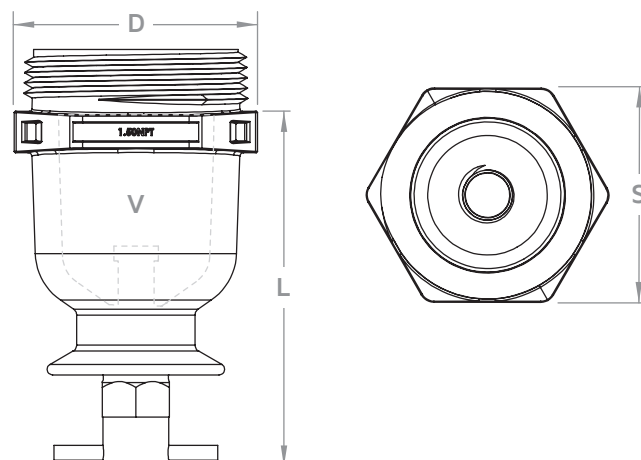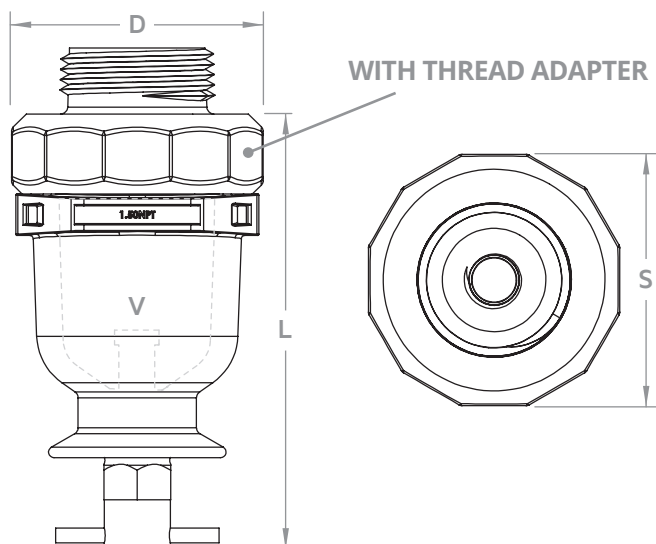

L - Length | D - Diameter | S - Wrench Size | V - Volume

SPECIFICATIONS

- **Application:** Drain ports
- **Volume:** 1.0 fl. oz.
- **Threads:** Varies (see table)
- **Dimensions:** Varies (see table)
- **Shipping Weight:** 12 oz. each
- **Recommended Temperature:** -40°F to 200°F (-40°C to 93°C)
- **Recommended Pressure:** 65 psi./4.5 bar
- **Sampling/Drain Valves:** Drain valve, spiral to open, turn to lock
- **Materials:** Bowl: High-impact Tritan™ (a crystal-clear copolyester); Adapter: zinc-plated steel; Drain valve: brass; Magnet (optional): Strong neodymium rare earth magnet
- **Outdoor Compatibility:** UV-resistant to protect against long-term sun exposure
- **Chemical Compatibility:** Resistant to mineral and synthetic oils that are compatible with fluorocarbon elastomers (Viton™) and PMMA (acrylic) plastic

DESCRIPTION	PART NUMBER	L	D	S	V
1/2" NPT	BOWL.050	3.7"	2.2"	2 1/8"	1.0 fl.oz.
1/2" NPT Magnetic	BOWL.050.MAG	3.7"	2.2"	2 1/8"	1.0 fl.oz.
3/4" NPT	BOWL.075	3.7"	2.2"	2 1/8"	1.0 fl.oz.
3/4" NPT Magnetic	BOWL.075.MAG	3.7"	2.2"	2 1/8"	1.0 fl.oz.
1" NPT	BOWL.100	3.7"	2.2"	2 1/8"	1.0 fl.oz.
1" NPT Magnetic	BOWL.100.MAG	3.7"	2.2"	2 1/8"	1.0 fl.oz.
1 1/2" NPT	BOWL.150	3.0"	2.0"	1 13/16"	1.0 fl.oz.
1 1/2" NPT Magnetic	BOWL.150.MAG	3.0"	2.0"	1 13/16"	1.0 fl.oz.